

## Recycling advice



Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or retailer for recycling advice.

---

## Safety information

For your safety, always switch off the supply before cleaning.

## Instruction leaflet

---

# Zira Pendant

69495, 69496, 70628, 70629



CE

saxby  
lighting

Thank you for purchasing this light fitting. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product. Please retain these instructions for future reference.

## Warning

### This is a Class 1 product and must be earthed.

Please read these instructions carefully before commencing any work.

This unit must be fitted by a competent and qualified electrician.

Install in accordance with IEE Wiring regulations and current Building Regulations.

To prevent electrocution switch off at mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge. If you are in any doubt, please consult a qualified electrician.

This light fitting should be connected to a circuit with a 30mA RCD fitted.

If replacing an existing fitting, make a careful note of the connections.

The unit cannot be dimmed.

This system contains non-replaceable parts and cannot be serviced. If damage occurs the part should be scrapped.

Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your local authority or retailer for recycling advice.

This product is not suitable for location in or near a marine environment.

The entire unit gets hot whilst on for a period of time.

Terminal block not included. Installation may require advice from a qualified person.

This product is not supplied with a chain or hook combination for means of fixing devices, as it will be the responsibility of the qualified electrician to install an adequate means of fixing/suspension devices, dependant on the application and location that the product is being installed

## Specification

Voltage:	240V ~ 50Hz
Lamp:	69495: 50W LED Module - 3850lm 69496: 100W LED Module - 7800lm 70628: 150W LED Module - 12870lm 70629: 200W LED Module - 16950lm
IP rating:	20

## Layout

- Plan the desired layout of this fitting carefully, ensuring the cables will reach the distance between the junction box and the light fitting.
- Avoid locating any cables in positions that would cause a hazard. Position cables and junction boxes (not supplied) away from areas where they may be at risk from being cut, trapped or damaged.
- Cables must be protected using suitable conduit or plastic trunking.

## Installation


Existing fittings must be completely removed before installation of a new product. Before removing the existing fitting, **carefully note the position of each set of wires.**

- Decide on the optimum location and height for the product.
- Ensure the ceiling is capable of holding the weight of the product. Ensure there is a joist at the point of fixing to support the weight of the product.

- Source a suitable hook and chain link or similar to attach the product to the joist.
- Attach product to chain or similar and joist. Take care not to damage any concealed wiring or pipes.
- Wire as detailed below.

## Wiring

Terminal block not included. Installation will require advice from a qualified person. Connect to an approved terminal block, observing the wiring diagram here:-

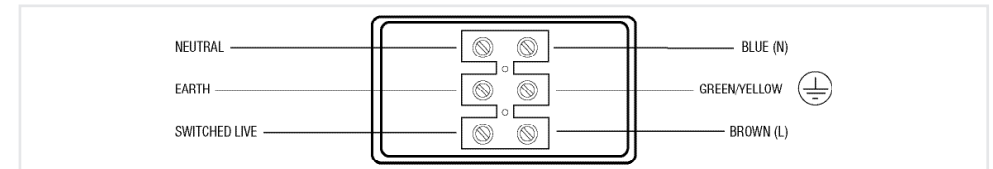

## Check that...

- You have correctly identified the wires.
- The connections are tight.
- No loose strands have been left out of the connection block.

## Commissioning

- Replace fuse or circuit breaker and switch on. Your light is now ready for use.

## Fitting/replacing bulbs

- This system contains non-replaceable parts and cannot be serviced. If damage occurs the part should be scrapped.

We recommend cleaning with a soft dry cloth.

Do not use solvents or abrasive cleaners as these could damage the finish.